



Gas pipes RC MULTIsafe®3L

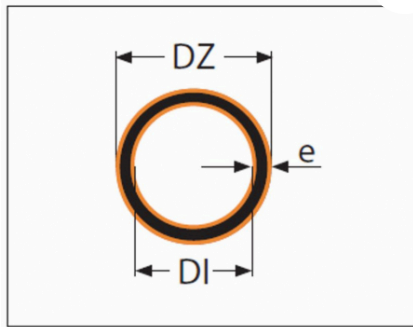

Three-ply RC MULTIsafe®3L pipes (middle ply in black and both outermost plies in orange with thickness from 10% to 30%, where the outermost internal lack is at least 2,5mm thick – type 2 – in accordance with PAS 1075:2009.04) intended for gas are manufactured with diameters from 90 to 500 mm.

Category: 3-layer pipe RC
MULTIsafe® PE100 RC 3L



Description


Gas pipes RC MULTIsafe®3L – coils





| Diameter | Wall thickness SDR 11 | Wall thickness SDR 17 | Wall thickness SDR 17,6 | Quantity in circle |
|----------|-----------------------|-----------------------|-------------------------|--------------------|
| [mm] | [mm] | [mm] | [mm] | [mb] |
| 90 | 8,2 | 5,4 | 5,2 | 100 |
| 110 | 10,0 | 6,6 | 6,3 | 50 |

Gas pipes RC MULTIsafe®3L – sections and '12 mb

| Diameter | Wall thickness SDR 11 | Wall thickness SDR 17 | Wall thickness SDR 17,6 | Quantity in circle |
|-----------------|----------------------------------|----------------------------------|------------------------------------|-------------------------------|
| [mm] | [mm] | [mm] | [mm] | [mb] |
| 90 | 8,2 | 5,4 | 5,2 | 384 |
| 110 | 10,0 | 6,6 | 6,3 | 312 |
| 125 | 11,4 | 7,4 | 7,1 | 276 |
| 140 | 12,7 | 8,3 | 8,0 | 240 |
| 160 | 14,6 | 9,5 | 9,1 | 204 |
| 180 | 16,4 | 10,7 | 10,3 | 120 |
| 200 | 18,2 | 11,9 | 11,4 | 120 |
| 225 | 20,5 | 13,4 | 12,8 | 96 |
| 250 | 22,7 | 14,8 | 14,2 | 72 |
| 280 | 25,4 | 16,6 | 16,0 | 36 |
| 315 | 28,6 | 18,7 | 17,9 | 36 |
| 355 | 32,3 | 21,1 | 20,2 | 36 |
| 400 | 36,4 | 23,7 | 22,8 | 24 |
| 450 | 41,0 | 26,7 | 25,5 | 24 |
| 500 | 45,5 | 29,7 | 28,5 | 24 |

Related products



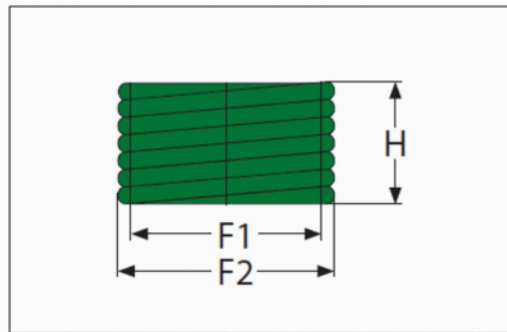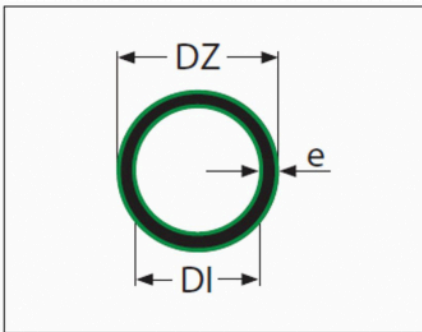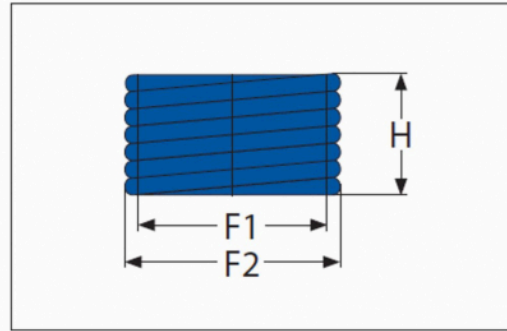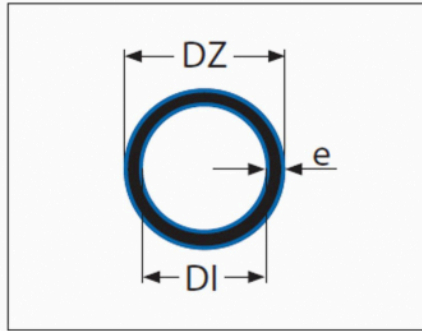

RC MULTIsafe®3L pipes for tap water (sewage system) with PE 100 RC

Three-ply RC MULTIsafe®3L pipes (middle ply in black and both outermost plies in green with...)